



**Micro Power**

**SWITCHING MODE POWER SUPPLY**

**Sanstar Microsystems Private Limited**

EL-15, Electronic Zone, M.I.D.C,  
Hingna Road, Nagpur 440-016 (India).

Mobile: 9823315380,  
9765557595, 9765557597.

Telefax: +91 (07104) 232292, 235216.

E-mail: [sales@sanstarindia.com](mailto:sales@sanstarindia.com).

**DATA SHEET**

**Model No: SSM1502**


**Ordering Code: SSMUB1502**

### **SMPS Cum Battery Charger 13.8V@ 2A.**

#### **Features:**

- Power Integrated (PI device) TOP switch based Off-Line Switcher.
- Maximum Output Power 30W.
- High efficiency, High reliability and Low cost.
- Universal AC input range 90V ~ 265VAC.
- Complete isolation between input & output.
- Frequency jittering reduces EMI and EMI filtering costs.
- Soft start circuit to limit the AC inrush current.
- Three pin power cord for Input.
- Two core cable for Output
- Battery mounting arrangement ( 7AH/ 4AH).
- Compact, Light Weight, Metal Chassis, Panel Mounting.
- Hysteretic thermal shutdown for automatic fault recovery.
- 100% Full load burn-in Test.
- Lower cut-off voltage (Optional Factory adjustable).
- Line feed forward with maximum duty cycle (DC max.) reduction rejects line ripple and limits DC max. at high line.

#### **Derating Curve for SMPS cum Battery Charger 13.8V 2A.**

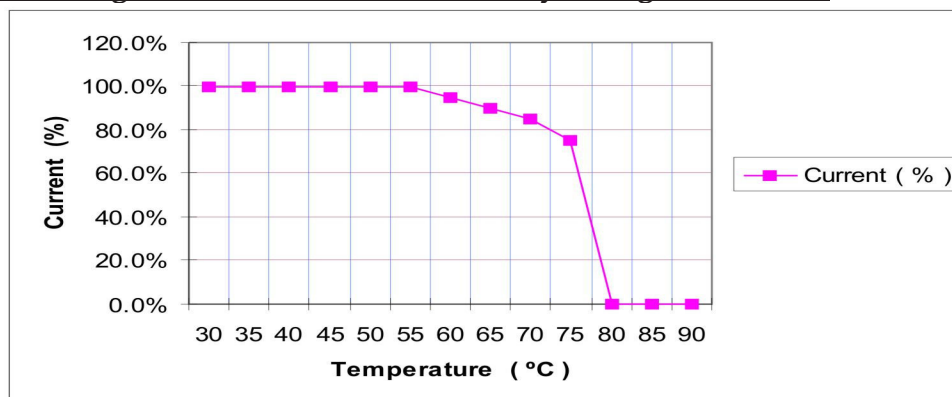

## Specifications:

### \* Input Characteristics

Input Voltage	90V – 265V AC.
Input Frequency	45 – 60 Hz.
Input Connector	3Pin power cord
Input Protection	Glass Fuse 2 Amp, 20mm fast blow.
Filters	EMI/RFI.

### \* Output Characteristics

Output Voltage	13.8 VDC (Max.15V).
Output Current	2 A (Total: BC+SMPS).
Max. Output Power	30 W.
Output Connector	2 core cable 1.5ft.
Output Indication	Output Ok – Green colour LED. Battery on – Red colour LED. Mains Failure – Yellow colour LED.
Output Protections	1.Lower Cut-off Voltage for long Battery life. 2.Over Temperature Protection (OT) at 100°C.
Line Regulation	< + / - 0.5%.
Load Regulation	< + / - 1.5%.
Ripple and Noise	< + / -2.5% P-P.

### \* Environmental Characteristics

Operating Temperature	55 °C at Full Load and 70°C at 60% load.
Maximum Temperature Rise	50°C
Cooling	By free air convection.
Relative Humidity	95% NC.

### \* General Characteristics

Efficiency	80%.
Hold Time	> 20mSec on full load.
Dimension (L X W X H) mm	200 X 190 X 80.
Mounting	Panel Mounting.

Note:

- 1) All these parameters are specified at 230V AC input.
- 2) For continuous improvement, specifications are subject to change without prior intimation.